LUMIPLUS ESSENTIAL FLAT PROJECTOR


Surface mounted projector.



		75821	75821WW
E	Color	White	Warm White
	Power	14,5 W (20 VA)	
	Luminous flux	1.485 lm	
	Temp. Color	5.700 K	3.000 K

		75824	75825	75826
G	Color	RGB	RGB RC1100	
	Power	22 W (29 VA)		
	Luminous flux	1.100 lm		
	Remote Control	Not included	Included	Not included
	Control	Can be controlled by push-button 32458, LumiPlus Range Extender 64633 + RC1100 remote controller 75773 or Lumi-Plus Connect controller 76290.	Works with remote control 75773.	

VOLTAGE:	12 V AC
FREQUENCY:	50/60 Hz
SERVICE LIFE:	L70-50,000 h
MAX. WATER TEMPERATURE:	40 ºC
MAX. INSTALLATION DEPTH:	2 m
MAXIMUM WATER TREATMENT VALUES:	
	Chlorine: 2 mg/l Bromine: 5 mg/l Salt chlorinator (NaCl): 6 g/l Pool water pH: 7.2 and 7.6
CABLE:	2.5 m. H07RN-F 2 x 1 mm^2
MATERIALS:	Polyamide
AVAIBLE DECORATIVE RINGS COLOURS	
ADDING THE FINAL CODE :	Beige: CL090 Grey: CL129 Anthracite: CL144

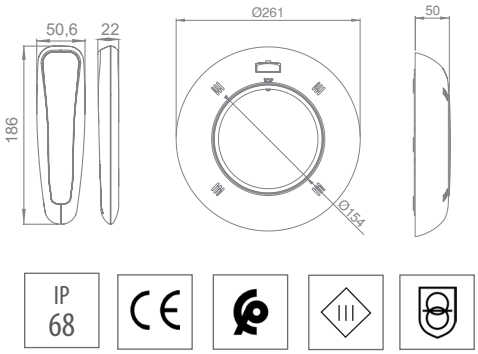

PACKAGING AND PALLETIZATION

Volume/Single box (m^3)	0,005
Weight/Single box (kg)	2,28
Units/Standard box	6
Volume/Standard box (m^3)	0,033
Weight/Standard box (kg)	13,68
Units/Pallet	336
Volume/Pallet (m^3)	2,58
Weight/Pallet (kg)	824,88

SINGLE BOX



MULTIPLE BOX

