Aquasphere SSP Pumps

200M / 300M

AQUA SPHERE



PRODUCT DESCRIPTION


- Self-priming range of pumps for residential swimming pools.
- Including a 2.8 liters prefilter and D63 mm couplings.
- Single-phase motors, IP-X5 protection and insulation class F.
- Flow rate range from 28.5 to 35.7 m^3/h at 10 m.c.w.

TECHNICAL DATA

Code	Model	Voltage	Nominal Flow at H_N	Nominal Head	Max. Head	Max. Flow Rate at 4m Head	Motor Rated Output	Max. Absorved Power	Energy Class
		U_N (V)	Q_N (m^3/h)	H_N (m)	H_{MAX} (m)	Q_{MAX} (m^3/h)	P_{2N} (kW)	P_{1MAX} (kW)	EN17645
75942	200M	230*	28.5	10	19.2	35	1.5	2.2	C
75943	300M	230*	35.7	10	22.7	43	2.2	2.8	C

* ± 10%

PERFORMANCE

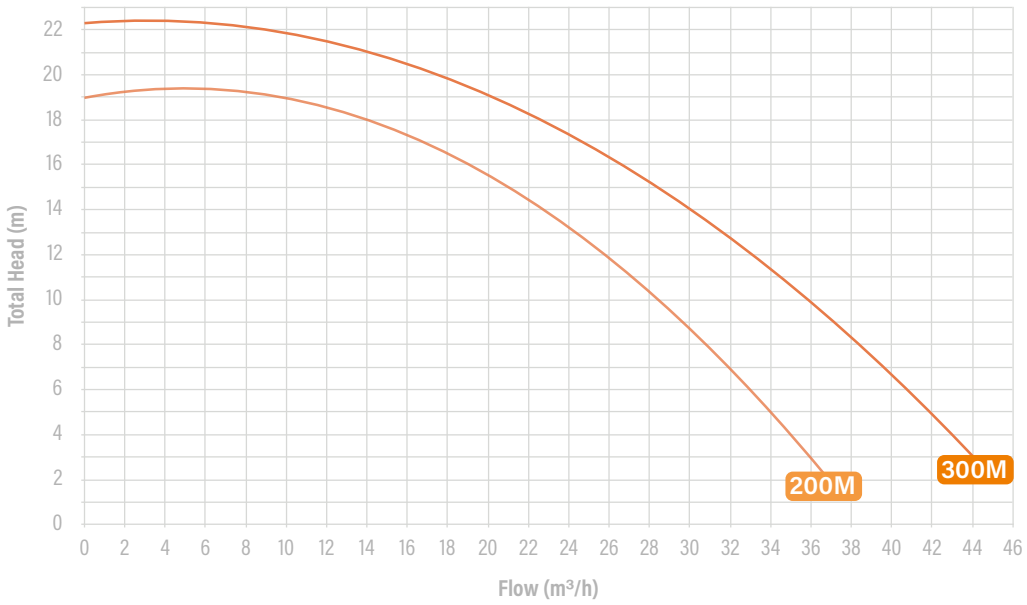


Aquasphere SSP Pumps

200M / 300M

AQUA SPHERE

DIMENSIONS & LOGISTICS

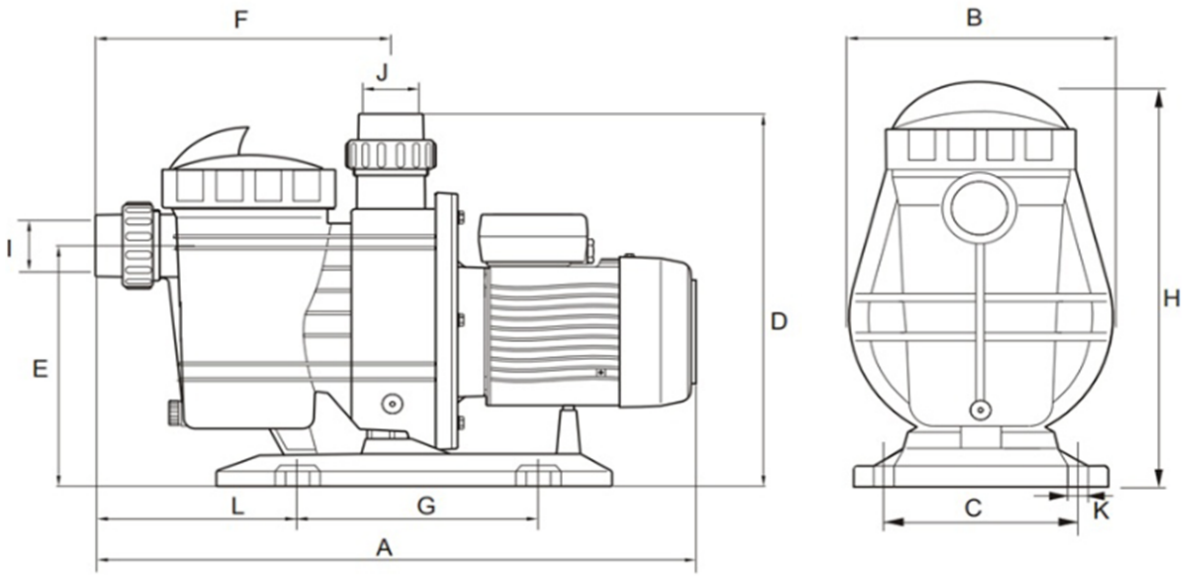

Code	Product dimensions (mm)												Packaging	
	A	B	C	D	E	F	G	H	I	J	K	L	Kg	m^3
75942	655	270	230	450	295	335	200	440	Ø63	Ø63	4u x Ø10	270	18.3	0.08
75943	655	270	230	450	295	335	200	440	Ø63	Ø63	4u x Ø10	270	19	0.08

A Fluidra Brand

©2024 Fluidra. All rights reserved. All trademarks and trade names used herein are the property of their respective owners.